

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS

REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A				

Product Specification

RATING:

VOLTAGE RATING: 30V AC (rms)

CURRENT RATING: 1.0A MAX

ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 30 milliohms max



INSULATION RESISTANCE: 100 megohms min

DIELECTRIC WITHSTANDING VOLTAGE: 500 V DC/1min

TOTAL MATING FORCE: 3.57 kgf max

TOTAL UNMATING FORCE: 1.0 kgf min

TEMPERATURE RANGE: -40°C ~ 85°C

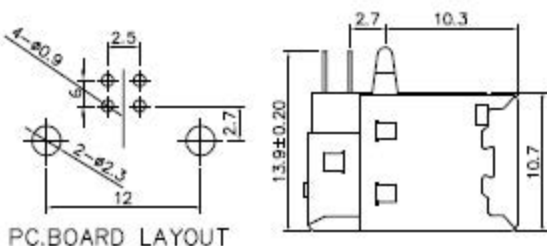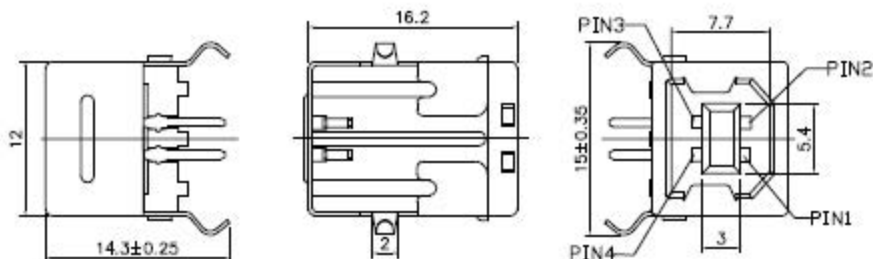

DO NOT SCALE DRAWING

DIMENSIONS

MM INCH ONLY

UNLESS OTHERWISE SPECIFIED:
 GENERAL TOLERANCE
 DIMINALS X ±0.38 (0.015) ANGLES X° ±3°
 .X ±0.25 (0.010) .X° ±1.0°
 .XX ±0.13 (0.005)

MATERIAL
 FINISH


CAD GENERATED DRAWING.
 DO NOT MANUALLY UPDATE

DRAWN BY AND DATE
 JUSTIN KING 06-16-06

CHECKED BY AND DATE
 JUSTIN KING 06-16-06

APPROVED BY AND DATE
 KING CHEU 06-16-06

THIRD ANGLE PROJECTION



SCALE 3:1 SIZE A3



Y-S ELECTRONIC CO., LTD.
 No. 101, Sec. 1, Long-An Street,
 Lu-Chu, Taoyuan, Taiwan, R.O.C.
 TEL: 886-3-3558929 FAX: 886-3-3559451

TITLE
 USB P.C.B. RIGHT ANGLE TYPE (B TYPE)

DRAWING NO.
35BA-042S11T

REV
A

FILE NO. SHEET 1 OF 1