

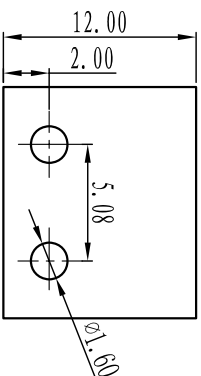


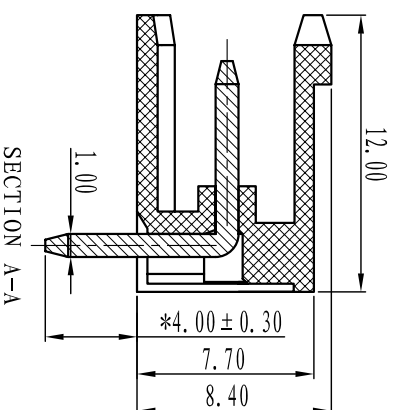

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

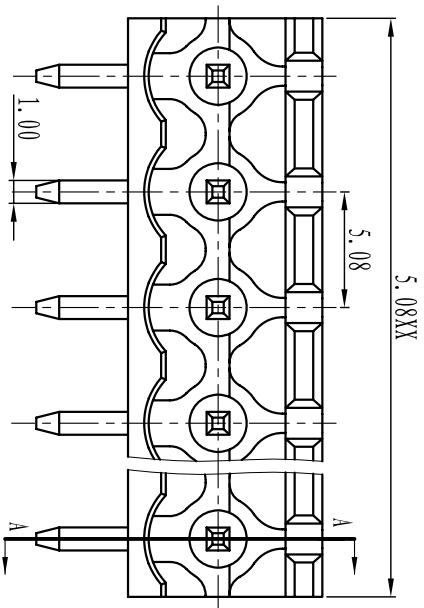

电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 320V
 额定电流/Rated current: 15A 20A
 接触电阻/Contact resistance: 20mΩ
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V
机械性能/Mechanical
 温度范围/Temp Range: -40°C~+105°C
 瞬间温度/MAX Soldering: +250°C, for 5 Sec


尺寸/Dimensions
 间距/Pitch: 5.08mm
 极数/Poles: 2P-24P

材料及电镀/Material
 塑件/Housing: PA66, UL94V-0
 焊针/Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle	sid	≡	□	//	⊥
variable range	over 6 to 30	over 30 to 120	over 480 to 480	all	6 to 6	over 6 to 10	over 10 to 50	over 50 to 120	all
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°
	over 6 to 30	over 30 to 120	over 480 to 480	all	6 to 6	over 6 to 10	over 10 to 50	over 50 to 120	all
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°
	over 6 to 30	over 30 to 120	over 480 to 480	all	6 to 6	over 6 to 10	over 10 to 50	over 50 to 120	all
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°

订购方式：
HOW TO ORDER

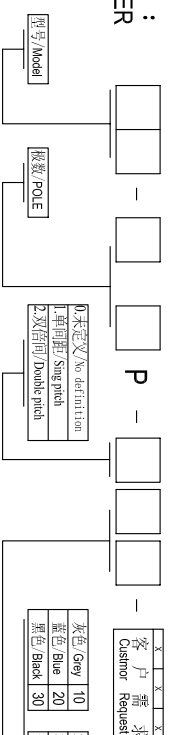

灰色/Gray	10	绿色/Green	40	透明/transparent	70
蓝色/Blue	20	黄色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ2DNGR-XXP-11Y-00A

第一视角/FIRST ANGLE PROJECTION

