REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

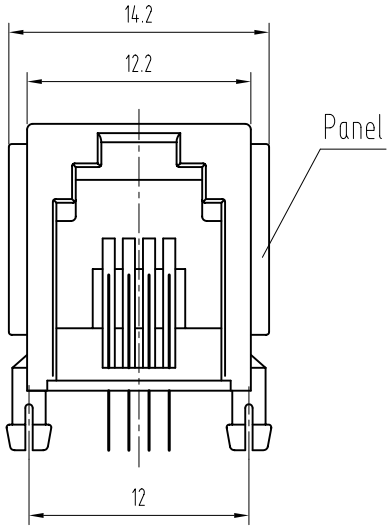

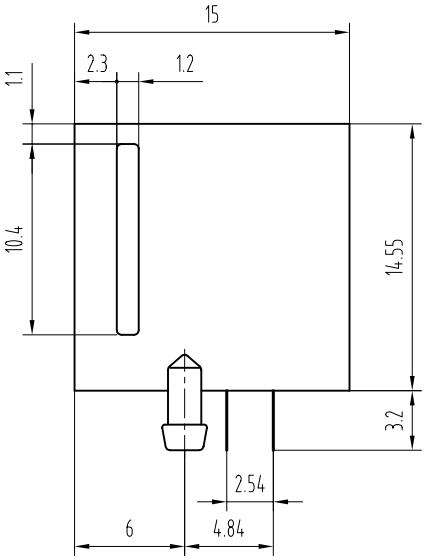

NOTES:

ELECTRICAL:

1.VOLTAGE RATING	:125 VAC RMS.
2.CURRENT RATING	:1.5 AMP.
3.CONTACT RESISTANCE	:30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	:1000 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC STRENGTH	:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1.HOUSING MATERIAL	:GLASS FILLED POLYESTER UL94V-0.
2.HOUSING COLOUR	:BLACK GRAY YELLOW OR OTHERS
3.CONTACT MATERIAL	:PHOSPHOR BRONZE Φ0.46mm.
4.PLATING	:GOLD PLATING OVER NICKEL.
5.OPERATING	:750 CYCLES MIN.
6.PCB RETENTION PRE-SOLDER	:1 LB MIN.

ENVIRONMENTAL:

1.Storage Temperature Range : -40℃~+85℃
2.Operatuon Temperature Range : 0℃~70℃
3.Wave oldering temperature:245±5(5～10 seconds)

PART NUMBER:

DY9755 - XX XX X X X X X - X X X - L

Part Nomber

Lead Free

Point NO.	Contact NO.	Panel	Shielded	High	Gap	Gold Thickness	Plastic	Part Color	Lo Go
04-4 Point	02-2 Contact	0-No Panel	0-No Shielded	1-H=15	1-No Gap	1-Fu"	1-Nylon 66	1-Black	1-W "ZQP"
06-6 Point	04-4 Contact	1-With Panel	1-Shielded No EMI	2-H=13	2-With Gap	2-3u"	2-Nylon 46	2-Gray	2-W/O "ZQP"
08-8 Point	06-6 Contact					3-6u"	3-PBT	3-White	
	08-8 Contact					4-15u"		4-IV	
						5-30u"			
						6-50u"			



PCB LAYOUT

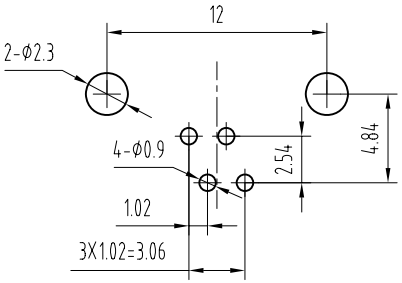

mm (inch)	DFTO: ChenFeifei	DATE: 2006.01.01	DUOYUAN TELECOM PRODUCTS CO.,LTD
	CHKD:	DATE:	
Tolerance Exept as Noted	MFO:	DATE:	
mm 0±0.2 ± 00±0.15 ± 000±0.075 ±	APPVL:	DATE:	DY9755-040410112-322-L
	MATERIAL:		
ANGLES ± 0.5	Q`TY:	DRAWING NO.	SIZE A4 / REV 06/05/02 0
	FINISH:	/PART NO.	
	SCALE: 2.5:1	DO NOT SCALE DRAWING	SHEET OF

DETACHED LISTS