

ORDER INFORMATION:  $\Delta$

2550TF1 X X

MATERIAL: \_\_\_\_\_ PLATING: \_\_\_\_\_





1=PHOSPHOR BRONZE P=Pre-Tin Plated  
 2=BRASS R=Post-Tin Plated  
 V=Matte Tin-Plated

ORDER NO./DIMENSIONS

ORDER NO.	TERMINAL TYPE	WIRE GAUGE	INSULATION DIAMETER	REEL Q'TY
2550TF1XX	CHAIN	#22~#28	$\phi$ 1.8 MAX.	6,000 PCS

NOTES:  
 \* ACCEPT HOUSING : 2550F SERIES

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LANDWIN ELECTRONIC CORP. SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

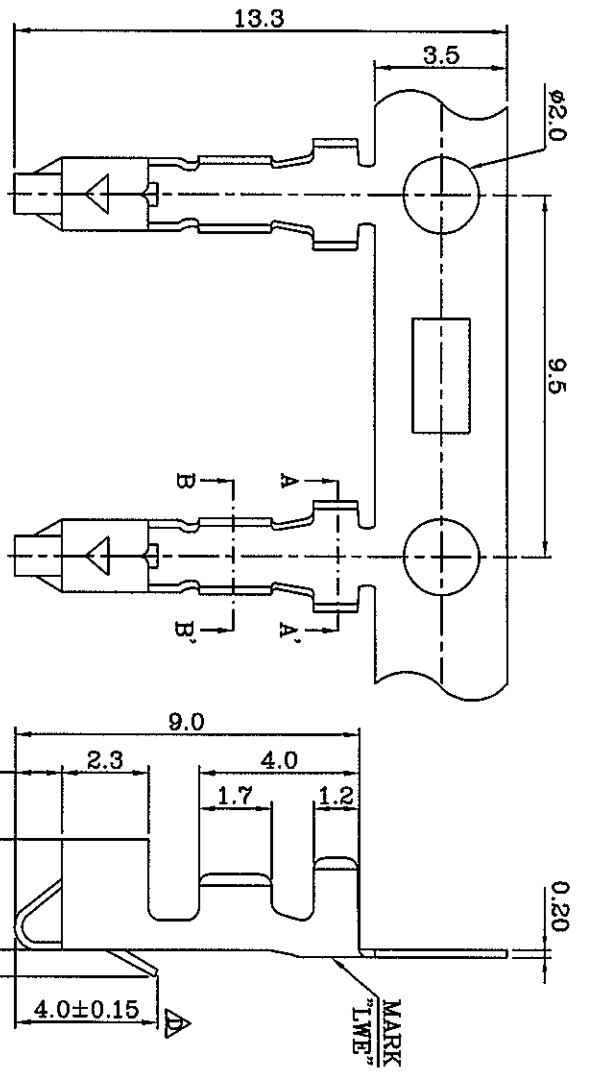

RoHS Compliant  
 Customer Drawing

MATERIAL: PHOSPHOR BRONZE/BRASS 0.2t		FINISH(COLOR): SILVER	
FILE NAME:			
D	ADD PLATING, CHANGE TOL.	TL100717	30/JUL/10
C	REVISE DIM, PUT MARK	941011	18/07/06
B	MODIFY DRAWING		29/JUN/06
A	NEW RELEASE		16/MAY/06
REV	REVISION RECORD	ECN NO.	DATE

SCALE	FREE	SHEET	1 OF 1
DRAWN BY: Ker-li	30/JUL/10	UNIT	mm
APPROVED BY: [Signature]	14/SEP/10	DRW NO.	(BQ) 2550TF1XX
GENERAL TOLERANCE:		ANGLE:	$\pm 3^\circ$
DIM:	$\pm 0.25$	TTITLE:	CRIMP TERMINAL
	$\pm 0.12$		
	$\pm 0.08$		

LANDWIN 聯盈電子股份有限公司  
 LANDWIN ELECTRONIC CORP.