




**RoHS  
Compliant**

VERSION	DESCRIPTION	DATE
1.0	New Release	2016/1/7

L=250mm(+50/10mm)

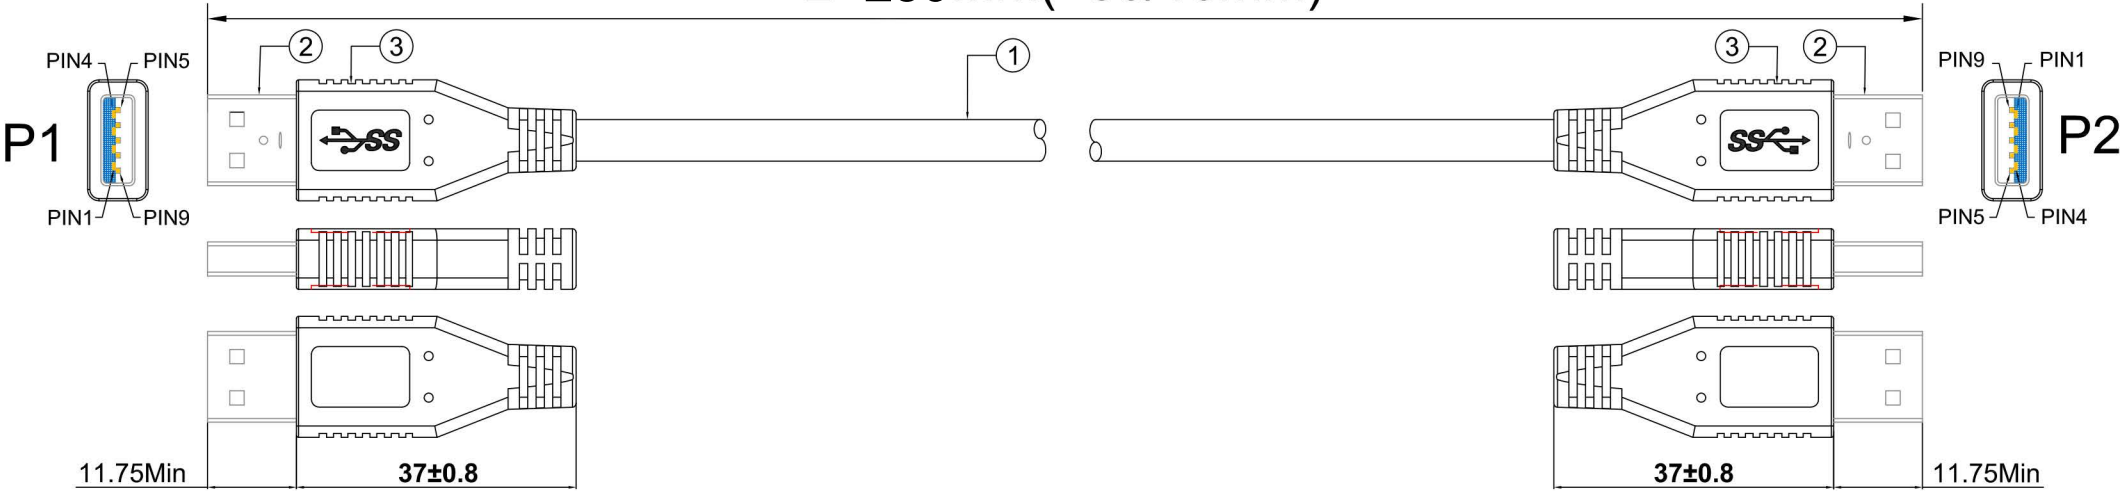

**Cable Structure(4:1):**

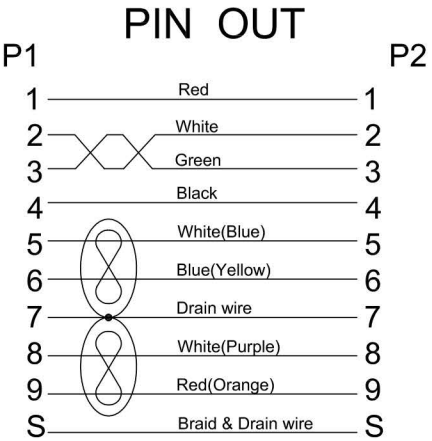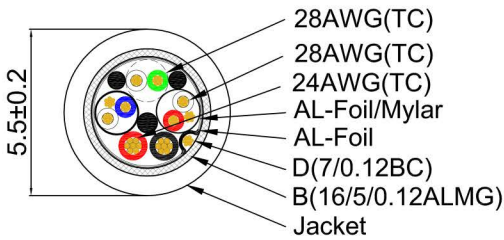

- Test:**
- (1)100% Open Short and miswire test.
  - (2)Insulation resistance 1 M.Ω MIN.

**联超电子(东莞)有限公司**  
**SYNOX TECH (DONGGUAN) CO., LTD**

Tel: 886-2-2738-6511(Taipei)  
+86-769-85383250(china)  
Fax: 886-2-2739-2232(Taipei)  
+86-769-85383335(china)  
E-mail: sales@synox.com.tw  
Website: www.synox.com.tw

5	
4	
3	PVC Black(BK/60P), Model:SR004
2	(P1&P2) USB 3.0 Type A Male, Pin Gold flash,Nickel plated steel shell, Insulation:Blue
1	USB 3.0 Cable: UL2725 [28AWG(7/0.127TC)*1P+D(7/0.12TC)+AL-Foil+Mylar]*2C + 28AWG(7/0.127TC)*1P +24AWG(7/0.20TC)*2C + AEB(16/5/0.12ALMG), PVC, O.D.=5.5 ±0.2mm, Black
No.	Description

UNIT		TITLE	
mm	angular	USB 3.0 Cable A Male / A Male black 0.25m	
unless otherwise stated Tolerances		P/N	1400900101
Customer P/N		SK-640-014	DRAWN BY Kay
SIZE A4		SCALE Free	CHECK BY Michael
PAGE		1/1	APPROVAL BY Johnson