

1. Overview

PON optical power meter is a tester designed for design, operation and maintenance of FTTX network. It is able to concurrently measure the optical power values of voice, data and video signals. It is an ideal choice for the construction and maintenance of FTTX network works.

2. Packaging list


- | | |
|----------------------------|--------|
| 1. PON optical power meter | 1 set |
| 2. User Guide | 1 copy |
| 3. Meter bag | 1 pcs |
| 4. Power adapter | 1 pcs |
| 5. Warranty Card | 1 pcs |
| 6. Pass Certificate | 1 pcs |

3. Specifications





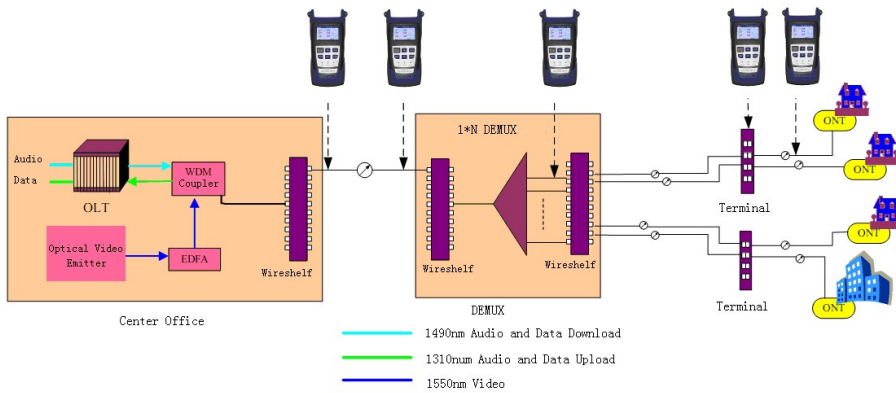

Calibrating wave length	1310 upstream measurement	1490 downstream measurement	1550 downstream measurement
Spectral passband (nm)	1260~1360	1470~1505	1535~1570
Measurement range (dBm)	-40~+10	-40~+10	-40~+15
Isolation 1310nm (dB)	-	>40	>40
Isolation 1490nm (dB)	>40	-	>30
Isolation 1550nm (dB)	>40	>40	-
Measurement accuracy			
Connatural uncertainty (dB)	±0.5		
PDL (dB)	<±0.25		
Linearity (dB)	±0.1		
Pass through insertion loss (dB)	<1.5		

General Indicators	
Display	LCD:320×240
Unit	dB dBm xW
Resolution	0.01dB
Input voltage	DC 6.5V~8.5V
Rechargeable battery	7.4V
AC adapter	8.4V
Type of optical fibre	Single mode optical fibre
Working temperature	-10~60℃
Storage temperature	-25~70℃
Dimensions (mm)	210 x 115 x 55

4. Operating Instructions




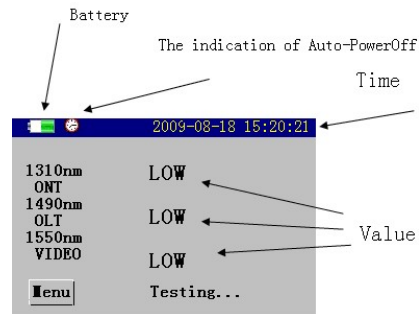
4.1 Function description

Icons	Functions
	POWER ON/OFF or set AUTO POWER OFF
	Access menu and select function
	Enter menu or select current operation
	Exit current operation without saving
	Select functions, +
	Select functions, -

5. Operation procedures


5.1 Power on

Press  to power on the device, the following screen will appear:




There are the measurement results of three wavelength appearing on the screen, i.e.: 1310nm upstream test and 1490nm/1550nm downstream test. The measurement value will appear when there is light passing through the optical channel, otherwise “LOW” will appear.

5.2 POWER OFF

While the power meter is on,  press and hold it for about 2 seconds to power off the device.

5.3 Set threshold value

The setting of threshold value will influence the status of measurement results. For example, if -30, -40, it means that: when the optical power greater than -15dbm, the optical circuit will be indicator turns in green; when the optical power within -15dBm~-30dBm, it means that problems still usable, the moment the 1310nm indicator turns measurement value of 1310nm is within -30dBm~-40dBm, it means that there exists abnormal in optical channel, the moment the 1310nm indicator turns in red; if the optical power measurement value s less than -40dBm, the moment the 1310nm indicator turns in dark, “LOW” appears in the LCD area where the results are displayed. To conclude, “green” represents “Pass”, “yellow” represents “warning”, “red” and “dark” represent "Error". So does 1490nm or 1550nm test.



status of the three indicators and the option “1310nm” is set as: -15, measurement value of 1310nm is normal, the moment the 1310nm measurement value of 1310nm is may exist in optical channel but it is in yellow; when the optical power measurement value of 1310nm is within -30dBm~-40dBm, it means that there exists abnormal in optical channel, the moment the 1310nm indicator turns in red; if the optical power measurement value s less than -40dBm, the moment the 1310nm indicator turns in dark, “LOW” appears in the LCD area where the results are displayed. To conclude, “green” represents “Pass”, “yellow” represents “warning”, “red” and “dark” represent "Error". So does 1490nm or 1550nm test.

- (1) While in main interface, press **MENU**, a menu as below will pop up:
- (2) Select the setting you desire by pressing **▲** and **▼**, press **ENTER**, to enter the setting interface as shown below:
- (3) Here user can set language, time, auto power off, incidental mode, threshold value, calibration. For example, if you select “threshold value”, the setting interface will appear as below.
- (4) Press **MENU** to select option. Press **▲** or **▼** to increase or decrease the threshold by 1 respectively. If the option is Save, press **ENTER**, the change will take effect.
- (5) If the operation is Default, press **ENTER**, the default value.

	Pass	Warn	Fail
1310nm	-15	-30	-40
1490nm	-15	-30	-40
1550nm	-15	-30	-40

Save Restor

will take effect.

threshold value will be rest to be

5.4 Calibration

This ability is designed to set tolerance, it will

- (1) Enter setting interface, select Calibration, will appear as below:
- (2) Press **MENU** to select the option you desire. decrease the calibration value by 0.01 press **ENTER**, the change will take effect.
- (3) If the operation is Default, press **ENTER**, the default value.

	Value
1310nm	00.00 dbm
1490nm	00.00 dbm
1550nm	00.00 dbm
Bust	00.00 dbm

Save Restor

increase the power reading by 1. press **ENTER**, the calibration screen


Press **▲** or **▼** to increase or respectively. If the option is Save, threshold value will be rest to be

5.5 Data upload



The measurement results can be saved in the device, or be uploaded to PC using upper computer software. Connect one end of data cable to the port of PC Link in the device, the other end USB port of PC, run the upper computer software, and set the software as per default configuration, then you can directly click "Upload" on upper computer to transfer the data to PC.

5.6 Measurement procedures

- (1)  Press to power on the meter, enter threshold value setting interface to set threshold value.
- (2) Connect in the optical fibre to be tested.

It supports measurement of three wavelength i.e.: 1310nm upstream, 1490nm and 1550nm downstream at the same time.

For example: threshold value is (+3dBm, -10dBm, -30dBm), the measurement readings of the meter are: the value for 1310nm upstream test is +1dBm, which is within +3~-10dBm, it means that the optical circuit is normal, so in the testing screen, the power value for 1310nm is displayed in green; if the power value falls within -10dBm~-30dBm, it means that the optical circuit may be wrong but is still usable, so in the testing screen, the power value for 1310nm is displayed in yellow; if the power value falls outside of threshold value, it means that there exists abnormal in optical circuit, the power value of the optical circuit is too strong or too weak, so in the testing screen, the power value for 1310nm is displayed in red. So does 1490nm and 1550nm test.

6. Applications

FTTx/PON opening: it is used to measure all PON signals during opening stage, in order to verify and ensure network standards are satisfied;

FTTx/PON maintenance: it is used to solve various transfer problems, e.g.: dirty connector ends, bending, broken optical fibre, any of such problems may produce signal loss or decrease transfer performance.

7. Maintenance

1. Regularly clean the end of sensor, keep it free of grease, dirt. Don't use dirty, non-standard connector, don't insert in the end in poor polishing conditions, otherwise the sensor's end may be damaged, otherwise the performance of entire system may degrade.
2. Use only one adapter if possible.
3. If you are not going to use the tester for the time, cover the dust-proof cap immediately to keep the end clean. Long-time exposure in air may gather dust therefore influencing measurement accuracy.
4. Plug and unplug the adapter with care, don't leave any scratches on the ports.
5. Regularly clean the surface of sensor, when cleaning the sensor, please gently wipe the surface using cotton swab by circling the perimeter.
6. Handle the tester with care, protect it against fall or collision.

8. Warranty

No parts of the product can be repaired by user himself.

1. Warranty period: 18 months since the date of shipment. If any product defect within the above said period, we will repair or replace the defective product, however, in no events we will bear responsibilities in excess of the product's sales price.
2. If any fault occurs during usage, user can first solve them according to above trouble-shooting instructions, however, if such efforts fail, the user shall not open the cabinet of the product by himself, he should contact our market department or local dealers.
3. For any quality problem arising of production defect, the manufacturer will repair or replace the defective product free of charge, however, any damage caused by improper-operation or good product will not be covered by the above warranty.

Notwithstanding the foregoing terms, any problem/fault caused for the following reasons are not included warranty.



1. The product has been repaired or modified without the authorization of the manufacturer
2. The problem or fault arising of improper use, negligence or incidence.

Warranty Registration

The product is accompanied by a Warranty Registration Card, please complete it and send it back to us together with a photocopy of the invoice, they will be used as the voucher for any maintenance, technical update or calibration that we may make in the future.



www.secon.com.br

Product Link : <https://www.secon.com.br/produto/medidor-de-potencia-optica-pon-pon-power-meter/>

